


URINAL

Connect

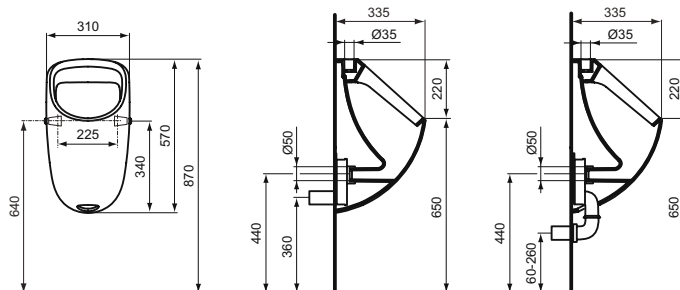

Article-No.: **E567201**

Urinal, top inlet

Connect urinal with top inlet and horizontal or vertical outlet (hole in bottom); flush 0,3 - 0,7 l / sec. At least 2 l. of water per flush. Including fixation kit TT0257919. Recommended equipment: Connecting set for urinal K710667; Siphon HO K822367 or VO K751501; Concealed solid mounting frame for Urinals with Top inlet VV715602; Exposed flushing valve for urinal B7120AA or inlet B6928AA;

Colour: 01 - White

More product details:

Type:	Mains supply urinal
Mounting:	Wall mounted
Accreditations:	DIN EN 80; DIN EN 13407 CL1-I-2C
Operation Pressure (bar):	3
Net Weight (kg):	13.00
Material:	Vitreous China
Designer:	Studio Levien
Height (mm):	570
Width (mm):	310
Depth (mm):	335
Flush Type:	Mains flushed